


INSTALLATION DIMENSIONS

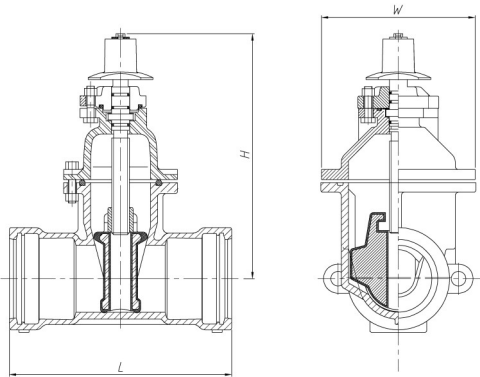


PO X PO, NRS, 4"-12"

SERIES 6500 • PUSH-ON X PUSH-ON NRS • GATE VALVE • AWWA C509/C515

SIZE	MODEL	H	L	W
4"	6504	15 7/8"	11"	9 3/4"
6"	6506	19 1/8"	12 3/4"	12 1/4"
8"	6508	23 1/2"	14 3/4"	15 1/4"
10"	6510	26 1/4"	15 3/4"	18 3/4"
12"	6512	30 3/4"	16 1/4"	22 5/8"

Offered: Open Left or Open Right. Optional Bevel or Spur Gear, Available

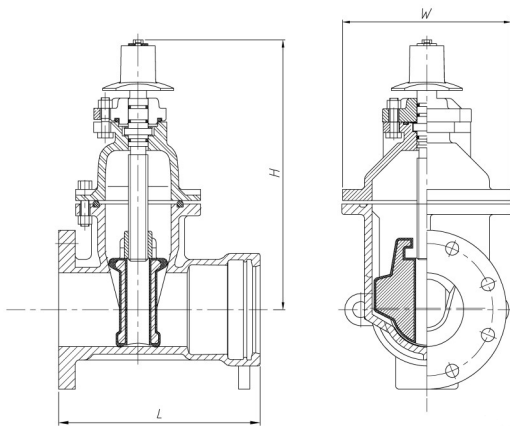


FL X PO, NRS, 4"-12"

SERIES 6400 • FL X PUSH-ON NRS • GATE VALVE • AWWA C509/C515

SIZE	MODEL	H	L	W
4"	6404	15 7/8"	11"	9 3/4"
6"	6406	19 1/8"	12 3/4"	12 1/4"
8"	6408	23 1/2"	14 3/4"	15 1/4"
10"	6410	26 1/4"	15 3/4"	18 3/4"
12"	6412	30 3/4"	16 1/4"	22 5/8"

Offered: Open Left or Open Right. Optional Bevel or Spur Gear, Available

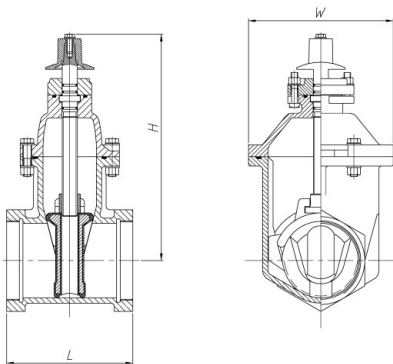

TH X TH, NRS, 2"- 3"

SERIES 6300 • TH X TH NRS • GATE VALVE • AWWA C509/C515

SIZE	MODEL	H	L	W
2"	6302	9 1/4"	6"	7 3/4"
2 1/2"	63025	11 3/4"	6 3/4"	7 3/4"
3"	6303	11 3/4"	7 1/8"	8 1/4"

Offered: Open Left or Open Right. Optional Bevel or Spur Gear, Available