


LEVER AND WEIGHT CHECK VALVE SERIES 9000 AWWA C508

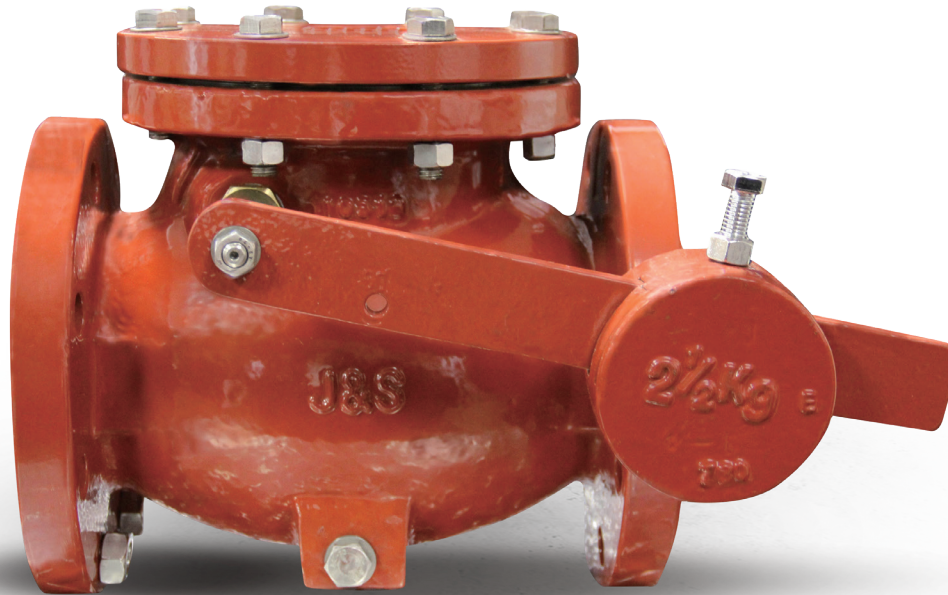

DESIGN FEATURES

BODY: Ductile Iron

BODY SEAT: ASTM B62 Bronze

DISC: Ductile Iron

DISC SEAT: ASTM B62 Bronze or Rubber

COVER: Ductile Iron

PACKING: EPDM O-Ring

FLANGES: ANSI B16.1 Class 125 Flanged

SIZES: 2" - 24"

INSTALLATION: Vertical or Horizontal Installation

WORKING PRESSURE:

- 12" and Smaller - 200 PSI Working Pressure
- 14" and Larger - 150 PSI Working Pressure

TESTING PER AWWA C508

COATING PER AWWA C550: Epoxy Coating Inside/Out

AVAILABLE:

- Lever and Weight
- Lever and Spring

OPTIONS:

- Stainless Steel Hardware
- Honeywell Limit Switches

DIMENSIONS SERIES 9000 LEVER & WEIGHT:

SIZE	2"	2.5"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
MODEL	9002	9025	9003	9004	9006	9008	9010	9012	9014	9016	9018	9020	9024
A	8"	8 1/2"	9 3/8"	11 3/8"	14"	19 3/8"	24 3/8"	27 1/2"	30 7/8"	35 5/8"	35 5/8"	40"	47 5/8"
B	4 5/8"	5 1/4"	5 1/2"	8 1/2"	8 1/2"	10 1/2"	12"	13 1/2"	17 5/8"	20 3/8"	21 5/8"	23 1/4"	26 5/8"

Design and Materials Subject to Change Without Notice. *Contact J&S Valve for Any Updated Drawing